
Accelerated Manual System Single Engine Kit

Item # AMF-1EPK

Installation Level: Certified Professional MECHANIC



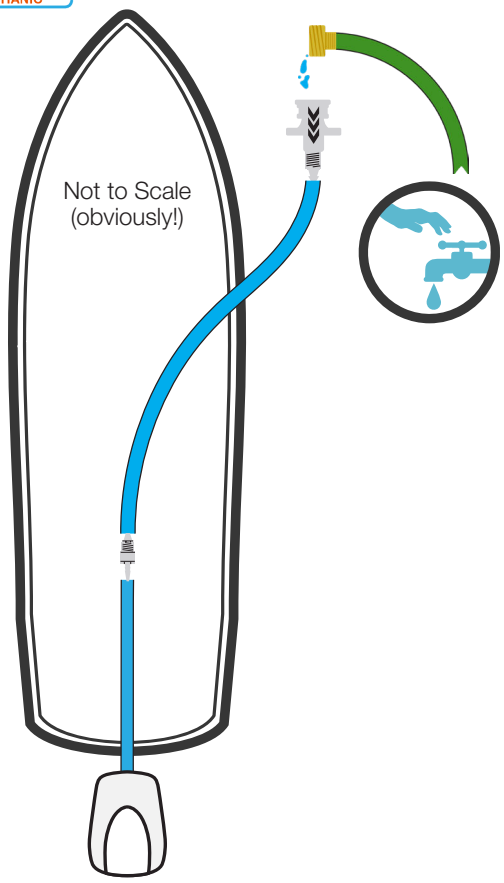

PHLUSHING CONVENIENCE

For single-engine vessels that cannot support a “push-button” PHIBER System, but still need a routine freshwater flush (FWF) at the end of the day, Accelerated Manual Systems torpedo conventional flushing methods through maximum convenience and efficiency.

The Single Engine Flush Kit allows for a flushing hose connection at a location that is convenient for the operator, eliminating difficult-to-reach flushing ports on the engine, and the often-risky gymnastics of performing flushing maintenance with outboard engines on the stern.

The Single Engine Kit features oversized fittings that allows the full-flow of a dock hose water into the engine during the flush process.

The FWF feed from the hose connection is run through the engine’s rigging bundle and connected into the native flushing network on the engine. Additional fittings (not included with the Kit) will be required to connect the FWF Feed to the engines native flushing network.

At PHIBER Systems, we only use premium materials in our products. The Flush Kit is comprised of a genuine USA-manufactured Perko hose connection, and 316 Stainless Steel NPT-to-barb hose fittings.

Flushing is best performed under the following conditions:

- Flush immediately after use (OFF) with engines at operating temperature
- Water pressure minimum 40 PSI
- Water flow minimum 6 GPM
- Flushing durations vary (see engine OEM documentation for specs)

Features

- Marine Grade Construction (no “planned obsolescence”)
- Minimal installation footprint and complexity
- Allows flushing for single or twin-engine configurations (additional fittings sold separately)
- Compatible with other PHIBER Overboard Manifolds
- Allows FWF hose connection at a convenient location

Kit Includes

- Flush Placard
- Perko Dock Hose Inlet
- NPT-to-Barb fittings (Stainless)

General	
Dock Hose Inlet Type	3/4” (standard garden/dock hose thread) GHT
Dock Hose Inlet Mounting	Bulkead mount
System Max Flow Rate (GPM)	20
Max Pressure	80 PSI
Material	Chromed Brass Hose Inlet, Stainless Fittings
Weight (Entire Kit)	2 lb (1.8 kg)
Dimensions	(assembled by installer)
Warranty	2-year Materials & Labor

MADE IN USA

Compliant to H23 Standards

© 2026 PHIBER Systems, LLC. All Rights Reserved.

SS20261027

sales@PHIBERSystems.com
www.PHIBERSystems.com